


Graphic Label 1.6”

2.4Ghz: (B/W)ESLGM016XX000, (B/W/R)ESLGR016XX000, (B/W/Y)ESLGY016XX00N

EXEMPLARY PICTURE



MECHANICAL DRAWINGS

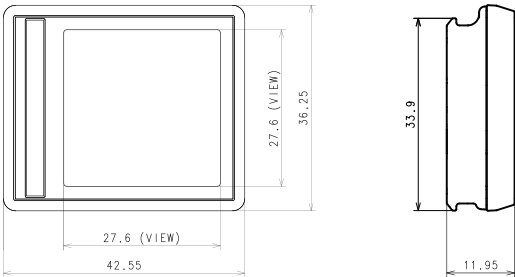

TECHNICAL DETAILS

Parameter	Unit	Specifications
Outer Dimension	mm/inch	36.25 x 42.55 x 11.95 mm / 1.42 x 1.67 x 0.47 inch
Weight	g	18.5
Case Color	-	White, Black and other color is available
Display Technology	-	Full graphic E-Ink Display
Active Display Area	mm/inch	27.60 x 27.60 mm / 1.08 x 1.08 inch
Display Resolution	Pixel	184 dpi (200 x 200) – Mono / 140dpi (152 x 152) – Color
Display Color	-	B/W, B/W/R, B/W/Y
Battery	-	CR2450 * 1EA
Estimated Battery Life	Year	5 Years @ Room Temperature (1 updates/Day)
Communication Protocol	-	IEEE802.15.4, 2.4GHz
Operating Temperature	°C/°F	0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR, BWY
Storage Temperature	°C/°F	-23 ~ 40°C (-9.4 ~ 104°F)
Wireless Connectivity	-	NFC
Multi-page	-	Up to 3 pages




Graphic Label 2.2”

2.4Ghz: (B/W)ESLGM022XX000, (B/W/R)ESLGR022XX000, (B/W/Y)ESLGY022XX00N

EXEMPLARY PICTURE



MECHANICAL DRAWINGS

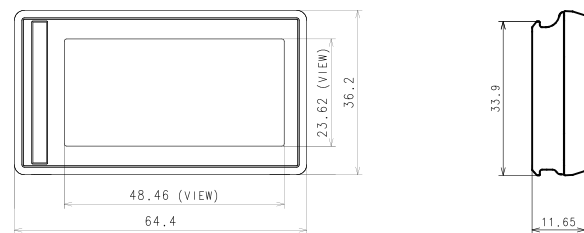

TECHNICAL DETAILS

Parameter	Unit	Specifications
Outer Dimension	mm/inch	64.40 x 36.20 x 11.65 mm / 2.53 x 1.42 x 0.45 inch
Weight	g	29.0
Case Color	-	White, Black and other color is available
Display Technology	-	Full graphic E-Ink Display
Active Display Area	mm/inch	48.46 x 23.62 mm / 1.90 x 0.92 inch
Display Resolution	Pixel	111 dpi (212 x 104)
Display Color	-	B/W, B/W/R, B/W/Y
Battery	-	CR2450 * 2EA
Estimated Battery Life	Year	5 Years @ Room Temperature (2 updates/Day)
Communication Protocol	-	IEEE802.15.4, 2.4GHz
Operating Temperature	°C/°F	0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR, BWY
Storage Temperature	°C/°F	-23 ~ 40°C (-9.4 ~ 104°F)
Wireless Connectivity	-	NFC
Multi-page	-	Up to 3 pages




Graphic Label 2.6”

2.4Ghz: (B/W)ESLGM026XX000, (B/W/R)ESLGR026XX000

EXEMPLARY PICTURE



MECHANICAL DRAWINGS

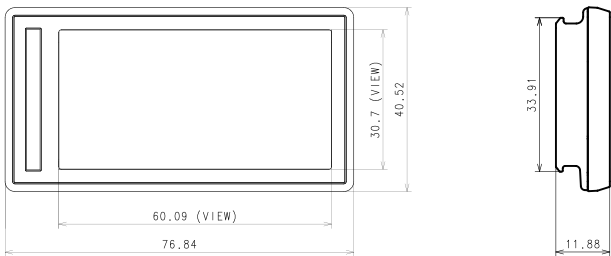

TECHNICAL DETAILS

Parameter	Unit	Specifications
Outer Dimension	mm/inch	76.84 x 40.52 x 11.88 mm / 3.02 x 1.59 x 0.46 inch
Weight	g	34.9
Case Color	-	White, Black and other color is available
Display Technology	-	Full graphic E-Ink Display
Active Display Area	mm/inch	60.09 x 30.70 mm / 2.36 x 1.20 inch
Display Resolution	Pixel	125 dpi (296 x 152)
Display Color	-	B/W, B/W/R
Battery	-	CR2450 * 2EA
Estimated Battery Life	Year	5 Years @ Room Temperature (2 updates/Day)
Communication Protocol	-	IEEE802.15.4, 2.4GHz
Operating Temperature	°C/°F	0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR
Storage Temperature	°C/°F	-23 ~ 40°C (-9.4 ~ 104°F)
Wireless Connectivity	-	NFC
Multi-page	-	Up to 3 pages




Graphic Label 2.9”

2.4Ghz: (B/W)ESLGM029XX000, (B/W/R)ESLGR029XX000, (B/W/Y)ESLGY029XX00N

EXEMPLARY PICTURE



MECHANICAL DRAWINGS

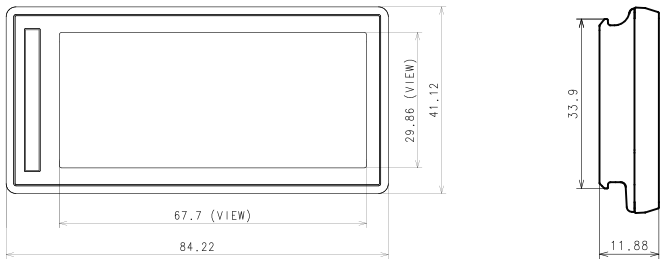

TECHNICAL DETAILS

Parameter	Unit	Specifications
Outer Dimension	mm/inch	84.22 x 41.12 x 11.88 mm / 3.31 x 1.61 x 0.46 inch
Weight	g	37.9
Case Color	-	White, Black and other color is available
Display Technology	-	Full graphic E-Ink Display
Active Display Area	mm/inch	67.70 x 29.86 mm / 2.66 x 1.17 inch
Display Resolution	Pixel	112 dpi (296 x 128)
Display Color	-	B/W, B/W/R, B/W/Y
Battery	-	CR2450 * 2EA
Estimated Battery Life	Year	5 Years @ Room Temperature (2 updates/Day)
Communication Protocol	-	IEEE802.15.4, 2.4GHz
Operating Temperature	°C/°F	0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR, BWY
Storage Temperature	°C/°F	-23 ~ 40°C (-9.4 ~ 104°F)
Wireless Connectivity	-	NFC
Multi-page	-	Up to 3 pages



Graphic Label 2.9” (real-time)

2.4Ghz: (B/W)TGXGM029XX00N, (B/W/R)TGXGR029XX00N, (B/W/Y)TGXGY029XX00N


EXEMPLARY PICTURE



TECHNICAL DETAILS

Parameter	Unit	Specifications
Outer Dimension	mm/inch	91.22 x 41.12 x 11.88 mm / 3.59 x 1.61 x 0.46 inch
Weight	g	37.9
Case Color	-	White, Black and other color is available
Display Technology	-	Full graphic E-Ink Display
Active Display Area	mm/inch	67.70 x 29.86 mm / 2.66 x 1.17 inch
Display Resolution	Pixel	112 dpi (296 x 128)
Display Color	-	B/W, B/W/R, B/W/Y
Battery	-	CR2450 * 2EA
Estimated Battery Life	Year	5 Years @ Room Temperature (2 updates/Day)
Communication Protocol	-	IEEE802.15.4, 2.4GHz
Operating Temperature	°C/°F	0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR, BWY
Storage Temperature	°C/°F	-23 ~ 40°C (-9.4 ~ 104°F)
Wireless Connectivity	-	NFC
Multi-page	-	Up to 3 pages

MECHANICAL DRAWINGS

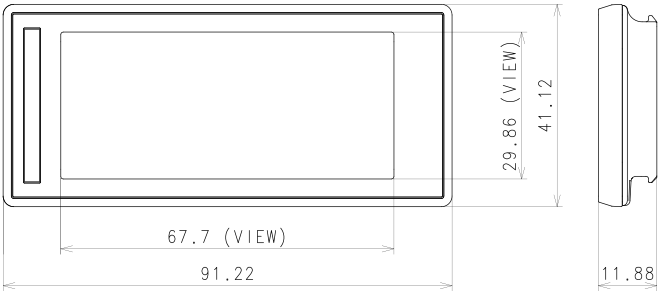


Graphic Label 4.2”

2.4Ghz: (B/W)ESLGM042XX00N2, (B/W/R)ESLGR042XX00N2

EXEMPLARY PICTURE



MECHANICAL DRAWINGS

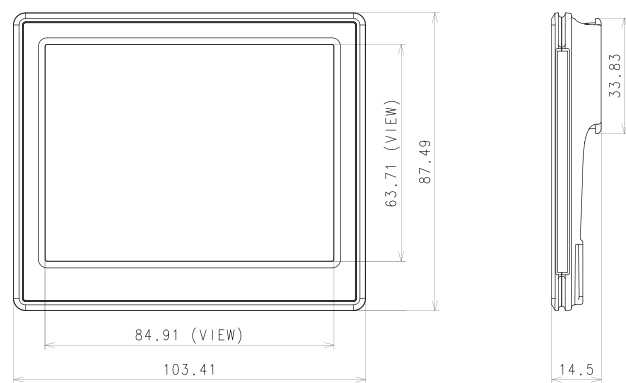

TECHNICAL DETAILS


Parameter	Unit	Specifications
Outer Dimension	mm/inch	103.41 x 87.49 x 14.50 mm / 4.07 x 3.44 x 0.57 inch
Weight	g	75.0
Case Color	-	White, Black and other color is available
Display Technology	-	Full graphic E-Ink Display
Active Display Area	mm/inch	84.91 x 63.71 mm / 3.34 x 2.50 inch
Display Resolution	Pixel	120 dpi (400 x 300)
Display Color	-	B/W, B/W/R
Battery	-	CR2450 * 2EA
Estimated Battery Life	Year	5 Years @ Room Temperature (2 updates/Day)
Communication Protocol	-	IEEE802.15.4, 2.4GHz
Operating Temperature	°C/°F	0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR
Storage Temperature	°C/°F	-23 ~ 40°C (-9.4 ~ 104°F)
Wireless Connectivity	-	NFC
Multi-page	-	Up to 3 pages




Graphic Label 4.2” (real-time)

2.4Ghz: (B/W)TGXGM042XX00N, (B/W/R)TGXGR042XX00N, (B/W/Y)TGXGY042XX00N

EXEMPLARY PICTURE

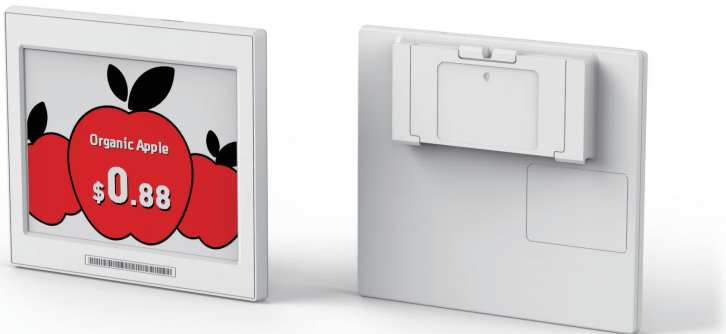

MECHANICAL DRAWINGS

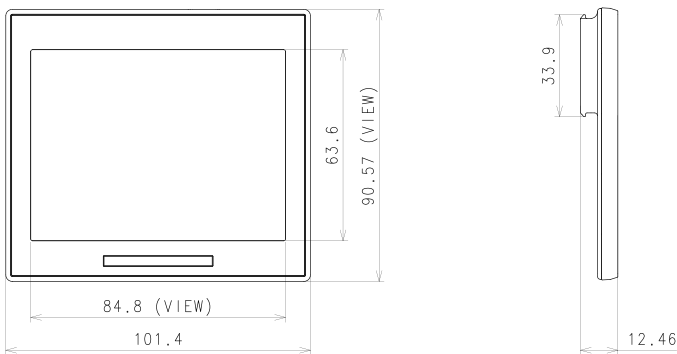

TECHNICAL DETAILS

Parameter	Unit	Specifications
Outer Dimension	mm/inch	101.40 x 90.57 x 12.46 mm / 3.99 x 3.56 x 0.49 inch
Weight	g	75.0
Case Color	-	White, Black and other color is available
Display Technology	-	Full graphic E-Ink Display
Active Display Area	mm/inch	84.80 x 63.60 mm / 3.33 x 2.50 inch
Display Resolution	Pixel	120 dpi (400 x 300)
Display Color	-	B/W, B/W/R, B/W/Y
Battery	-	CR2450 * 2EA
Estimated Battery Life	Year	5 Years @ Room Temperature (2 updates/Day)
Communication Protocol	-	IEEE802.15.4, 2.4GHz & Sub-Giga (900MHz/862MHz)
Operating Temperature	°C/°F	0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR, BWY
Storage Temperature	°C/°F	-23 ~ 40°C (-9.4 ~ 104°F)
Wireless Connectivity	-	NFC
Multi-page	-	Up to 3 pages




Graphic Label 4.3”

2.4Ghz: (B/W/R)ESLGR043XX00N

EXEMPLARY PICTURE



MECHANICAL DRAWINGS

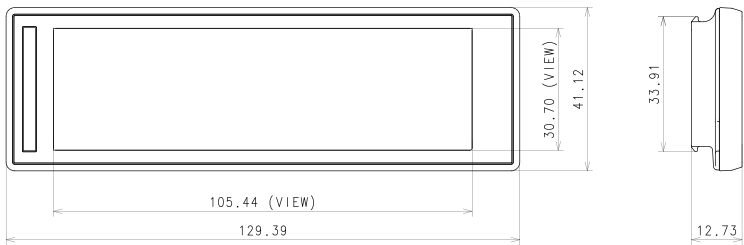

TECHNICAL DETAILS

Parameter	Unit	Specifications
Outer Dimension	mm/inch	129.39 x 41.12 x 12.73 mm / 5.09 x 1.61 x 0.50 inch
Weight	g	59.0
Case Color	-	White, Black and other color is available
Display Technology	-	Full graphic E-Ink Display
Active Display Area	mm/inch	105.44 x 30.70 mm / 4.15 x 1.20 inch
Display Resolution	Pixel	125 dpi (522 x 152)
Display Color	-	B/W/R
Battery	-	CR2450 * 2EA
Estimated Battery Life	Year	5 Years @ Room Temperature (2 updates/Day)
Communication Protocol	-	IEEE802.15.4, 2.4GHz
Operating Temperature	°C/°F	0 ~ 30°C (32 ~ 86°F)
Storage Temperature	°C/°F	-23 ~ 40°C (-9.4 ~ 104°F)
Wireless Connectivity	-	NFC
Multi-page	-	Up to 3 pages




Graphic Label 6.0”

2.4Ghz: (B/W)TGXGM069XX00N, (B/W/R)TGXGR060XX00N, (B/W/Y)TGXGY060XX00N

EXEMPLARY PICTURE



MECHANICAL DRAWINGS

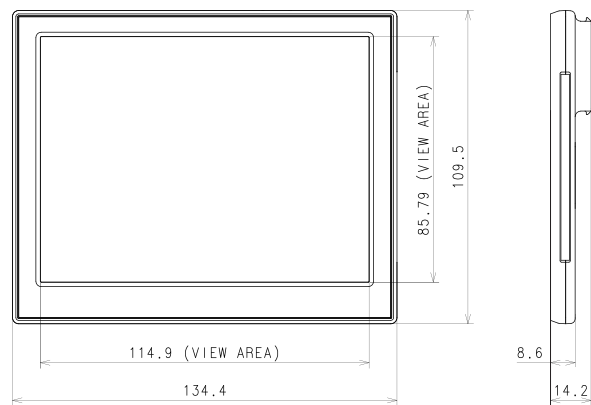

TECHNICAL DETAILS

Parameter	Unit	Specifications
Outer Dimension	mm/inch	134.4 x 109.5 x 14.20 mm / 5.29 x 4.31 x 0.55 inch
Weight	g	143.5
Case Color	-	White, Black and other color is available
Display Technology	-	Full graphic E-Ink Display
Active Display Area	mm/inch	114.9 x 85.79 mm / 4.52 x 3.37 inch
Display Resolution	Pixel	128 dpi (600 x 448)
Display Color	-	B/W, B/W/R, B/W/Y
Battery	-	CR2450 * 4EA
Estimated Battery Life	Year	5 Years @ Room Temperature (2 updates/Day)
Communication Protocol	-	IEEE802.15.4, 2.4GHz & Sub-Giga (900MHz/862MHz)
Operating Temperature	°C/°F	0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR / 10 ~ 30°C (50 ~ 86°F) - BWY
Storage Temperature	°C/°F	-23 ~ 40°C (-9.4 ~ 104°F)
Wireless Connectivity	-	NFC
Multi-page	-	Up to 3 pages




Graphic Label 7.5”

2.4Ghz: (B/W)TGXGM075XX00N, (B/W/R)TGXGR075XX00N, (B/W/Y)TGXGY075XX00N

EXEMPLARY PICTURE



MECHANICAL DRAWINGS

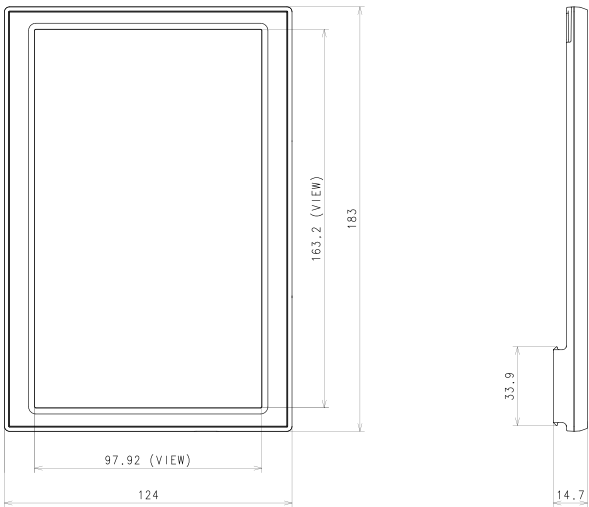

TECHNICAL DETAILS

Parameter	Unit	Specifications
Outer Dimension	mm/inch	183 x 124 x 14.7 mm / 7.20 x 4.88 x 0.57 inch
Weight	g	223.0
Case Color	-	White, Black and other color is available
Display Technology	-	Full graphic E-Ink Display
Active Display Area	mm/inch	163.2 x 97.92 mm / 6.42 x 3.85 inch
Display Resolution	Pixel	100 dpi (640 x 384) / 137 dpi (880 x 528)
Display Color	-	B/W, B/W/R, B/W/Y
Battery	-	CR2450 * 4EA
Estimated Battery Life	Year	5 Years @ Room Temperature (2 updates/Day)
Communication Protocol	-	IEEE802.15.4, 2.4GHz & Sub-Giga (900MHz/862MHz)
Operating Temperature	°C/°F	0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR / 10 ~ 30°C (50 ~ 86°F) - BWY
Storage Temperature	°C/°F	-23 ~ 40°C (-9.4 ~ 104°F)
Wireless Connectivity	-	NFC
Multi-page	-	Up to 3 pages




Graphic Label 11.6”

2.4Ghz: (B/W/R)EL116C2WRN/WWW

EXEMPLARY PICTURE



MECHANICAL DRAWINGS

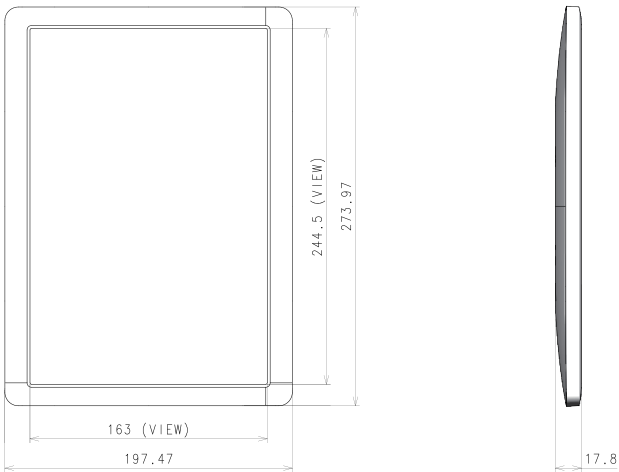

TECHNICAL DETAILS

Parameter	Unit	Specifications
Outer Dimension	mm/inch	273.97 × 197.47 × 17.8 mm / 10.78 x 7.77 x 0.70 inch
Weight	g	434.0
Case Color	-	White, Black and other color is available
Display Technology	-	Full graphic E-Ink Display
Active Display Area	mm/inch	244.5 x 163 mm / 9.62 x 6.41 inch
Display Resolution	Pixel	100 dpi (640 x 960)
Display Color	-	B/W/R
Battery	-	AAA * 4EA
Estimated Battery Life	Year	3 Years @ Room Temperature (2 updates/Day)
Communication Protocol	-	IEEE802.15.4, 2.4GHz
Operating Temperature	°C/°F	0 ~ 30°C (32 ~ 86°F)
Storage Temperature	°C/°F	-23 ~ 40°C (-9.4 ~ 104°F)
Wireless Connectivity	-	NFC
Multi-page	-	Up to 3 pages




Graphic Label 13.3”

2.4Ghz: (B/W/R)EL133C2WRN/WWW

EXEMPLARY PICTURE



MECHANICAL DRAWINGS

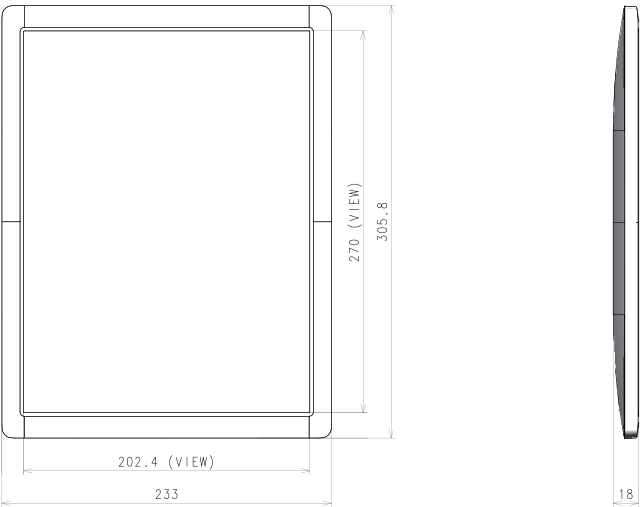

TECHNICAL DETAILS

Parameter	Unit	Specifications
Outer Dimension	mm/inch	305.8 × 233 × 18 mm / 12.03 x 9.17 x 0.70 inch
Weight	g	698.0
Case Color	-	White, Black and other color is available
Display Technology	-	Full graphic E-Ink Display
Active Display Area	mm/inch	270 x 202.4 mm / 10.62 x 7.96 inch
Display Resolution	Pixel	150 dpi (1600 x 1200)
Display Color	-	B/W/R
Battery	-	AAA * 4EA
Estimated Battery Life	Year	1.5 Years @ Room Temperature (1 updates/Day)
Communication Protocol	-	IEEE802.15.4, 2.4GHz
Operating Temperature	°C/°F	0 ~ 30°C (32 ~ 86°F)
Storage Temperature	°C/°F	-23 ~ 40°C (-9.4 ~ 104°F)
Wireless Connectivity	-	NFC
Multi-page	-	Up to 3 pages

